PRODUCT DATA SHEET

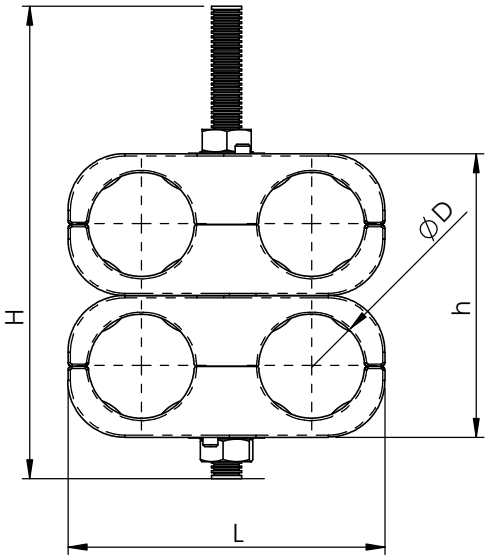

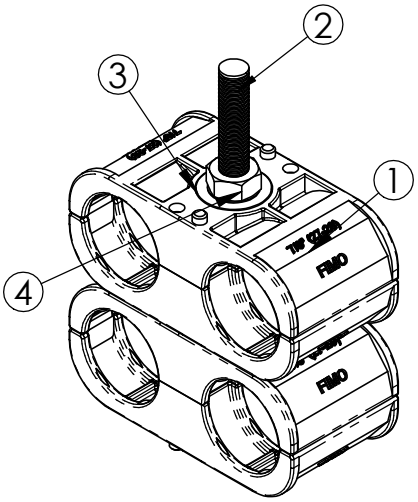

A) SPECIFICATIONS

1 SEB Single saddle P.P. black
2 Threaded bar - BFI M8 (SS)
3 Washers (SS)
4 Hexagonal Nuts M8 (SS)

B) RESISTANCE TESTS

UV Test BS-ISO 105-B06
Vibration test conforming to UNI 60068-2-6
Operating temperature: -30°C +120°C

C DELIVERY MODALITIES

Packing in boxes.
Label indicating:
product code, article, quantity,
production batch,
FIMO logo and figure.
(Customer code on request).

D) MOUNTING INSTRUCTIONS

on request

CODE	ARTICLE	ø D	L	h	H	BOX	WEIGHT
61 1586 0408	**UMO 4x8**	7 - 8	51	40	75	20	81
61 1586 0409	**UMO 4x9**	8 - 9	51	40	75	20	81
61 1586 0411	**UMO 4x11**	10 - 11	51	40	75	20	81
61 1586 0413	**UMO 4x13**	12 - 13	60	54	100	20	108
61 1586 0414	**UMO 4x1/2"S***	13 - 14	60	54	100	20	108
61 1586 0412	**UMO 4x1/2" (17)**	16 - 17	60	54	100	20	108
61 1586 0458	**UMO 4x5/8" (23)**	21 - 23	84	74	125	20	108
61 1586 0478	**UMO 4x7/8" (28)**	27 - 28	84	74	125	20	180
61 1586 4114	**UMO 4x1.1/4" (40)**	39 - 40	108	108	150	20	225
61 1586 4158	**UMO 4x1.5/8" (52)**	50 - 52	133	132	200	20	225

article **UMO 4**

RI	DATE	DR	DATE	AP
02				
01				
00	13/04/16	G.S.	13/04/16	A.V.
	1ST EMISSION			

Description:

Twin cable clamps for flat iron with holes
For 4 coaxial cables, complete with 4 calibrated saddles.
For articles see schedule.

FIMO® Setting Installation Standards

RoHS compliant. RoHS 2002/95/EC

Use:

Fastening of 4 coaxial cables on flat iron with holes

FI.MO.TEC. S.p.a. reserves the right to modify the technical specifications without prior notice, according to the technical progress
Copyright FI.MO.TEC. S.p.a. All rights reserved.