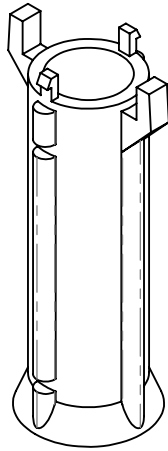
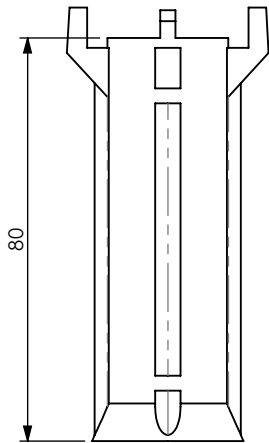


# PRODUCT DATA SHEET



## A) SPECIFICATIONS

Material: P.A.6 UL94-V0  
 Self Extinguishing, black colour,  
 halogen free (according to UL94-V0).  
 UV -Proof 1000 h test, according  
 BS ISO 105-B06.  
 Working temperature: -40°C +125°C.  
 Installation temperature: -20°C +60°C.



## B) ACCEPTANCE TEST

Visual and dimensional control on samples.

## C) DELIVERY MODALITIES

Packing in boxes. Label indicating:  
 product code, article, quantity,  
 production batch, FIMO logo and figure.  
 ( Customer code on request ).

code	<b>6160002480</b>
article	DRA 24/80

	
50	252 g.

RI	DATE	DR	DATE	AP	Description:  DRA 24/80 BLACK
02					
01					
00	06/10/15	G.S.	06/10/15	A.V.	
1 <sup>ST</sup> EMISSION					Use:  To keep RAC cable clamps separated from the wall. Fixing with P.A. plug R8/SP
