


PRODUCT DATA SHEET

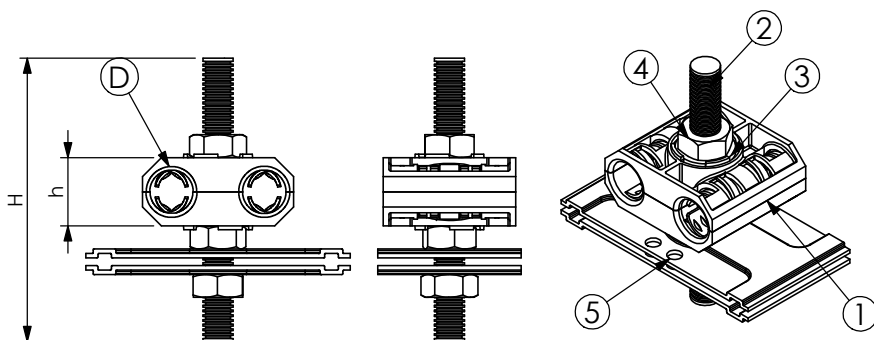

A) SPECIFICATIONS

- 1 Calibrated double black saddles made in P.A.
- 2 Stainless steel threaded bar BFI M8
- 3 Stainless steel flat Washer RPI 8/16
- 4 Stainless steel hexagonal nut DAI 8
- 5 Stainless steel pressure plate PUC 70

B) RESISTANCE TESTS

UV Test BS-ISO 105-B06
Vibration test conforming to UNI 60068-2-6
Operating temperature: -30°C +120°C

C) PACKAGING INFORMATION

Packing in boxes.
Label indicating:
product code, article, quantity,
production batch,
FIMO logo and figure.
(Customer code on request).

D) MOUNTING INSTRUCTIONS

On request

CODE	ARTICLE	ø D	h	H	BAG	WEIGHT
61 1588 0207	MML 2x7	4 - 7	18	50	20	99
61 1588 0209	MML 2x9	6 - 9	18	50	20	99
61 1588 0211	MML 2x11	8 - 11	18	50	20	99
61 1588 0214	MML 2x14	9 - 14	21	75	20	110
61 1588 0219	MML 2x19	14 - 19	26	75	20	113
61 1588 0224	MML 2x24	19 - 24	32	75	20	118
61 1588 0407	MML 4x7	4 - 7	36	75	20	117
61 1588 0409	MML 4x9	6 - 9	36	75	20	117
61 1588 0411	MML 4x11	8 - 11	36	75	20	117
61 1588 0414	MML 4x14	9 - 14	42	100	20	121
61 1588 0419	MML 4x19	14 - 19	52	100	20	137
61 1588 0424	MML 4x24	19 - 24	64	100	20	147
61 1588 0607	MML 6x7	4 - 7	54	100	20	135
61 1588 0609	MML 6x9	6 - 9	54	100	20	135
61 1588 0611	MML 6x11	8 - 11	54	100	20	135
61 1588 0614	MML 6x14	9 - 14	63	100	20	141
61 1588 0619	MML 6x19	14 - 19	78	125	20	161
61 1588 0624	MML 6x24	19 - 24	96	150	20	184

RI	DATE	DR	DATE	AP	Description:
02					MML - Mini-Clamps for steel wire-mesh cable trays Composition: MMO + 2 PUC steel pressure plate
01					
00	03/11/2015	G.S.	03/11/2015	A.V.	
1 ST EMISSION					Use: Fastening cables on wire-mesh cable trays
					
Setting Installation Standards					