


PRODUCT DATA SHEET

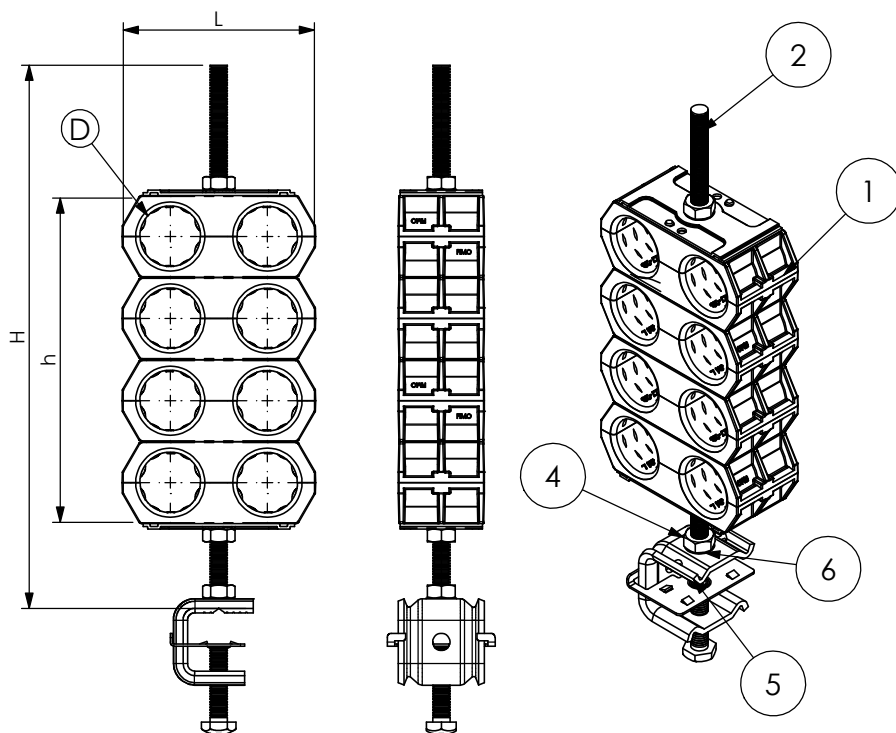

A) SPECIFICATIONS

- 1 Calibrated twin black saddles made in H.D.P.E
- 2 Stainless steel threaded bar BFI M8
- 3 Stainless steel pressure plate PRUC
- 4 Stainless steel hexagonal nut DAI 8
- 5 Stainless steel MCM 8 clamp
- 6 Stainless steel flat Washer REI 8

B) RESISTANCE TESTS

UV Test BS-ISO 105-B06
Vibration test conforming to UNI 60068-2-6
Operating temperature: -30°C +120°C

C) PACKAGING INFORMATION

Packing in boxes.
Label indicating:
product code, article, quantity,
production batch,
FIMO logo and figure.
(Customer code on request).

D) MOUNTING INSTRUCTIONS

On request

CODE	ARTICLE	ø D	L	h	H	BOX	WEIGHT
61 1560 0809	UCC/ 8x9	8 - 9	56	150	84	20	300
61 1560 0811	UCC/ 8x11	10 - 11	56	150	84	20	300
61 1560 0813	UCC/ 8x13	12 - 13	68	200	108	20	255
61 1560 0814	UCC/ 8x1/2"S (14)	13 - 14	68	200	108	20	255
61 1560 0838	UCC/ 8x3/8" (16)	15 - 16	68	200	108	20	255
61 1560 0812	UCC/ 6x1/2" (17)	16 - 17	68	200	108	20	255
61 1560 0858	UCC/ 8x5/8" (23)	21 - 23	90	250	152	20	480
61 1560 0878	UCC/ 8x7/8" (28)	27 - 28	90	250	152	20	480

RI	DATE	DR	DATE	AP	Description: <i>Cable Clamp type UCC +MCM 8 Clamp</i>
02					
01					
00	03/11/2015	G.S.	03/11/2015	A.V.	
	1 ST EMISSION				
					Use: <i>Fastening of 6 cables on flats, rounds and angulars</i>

FI.MO.TEC. S.p.a. reserves the right to modify the technical specifications without prior notice, according to the technical progress
Copyright FI.MO.TEC. S.p.a. All rights reserved.