


PRODUCT DATA SHEET

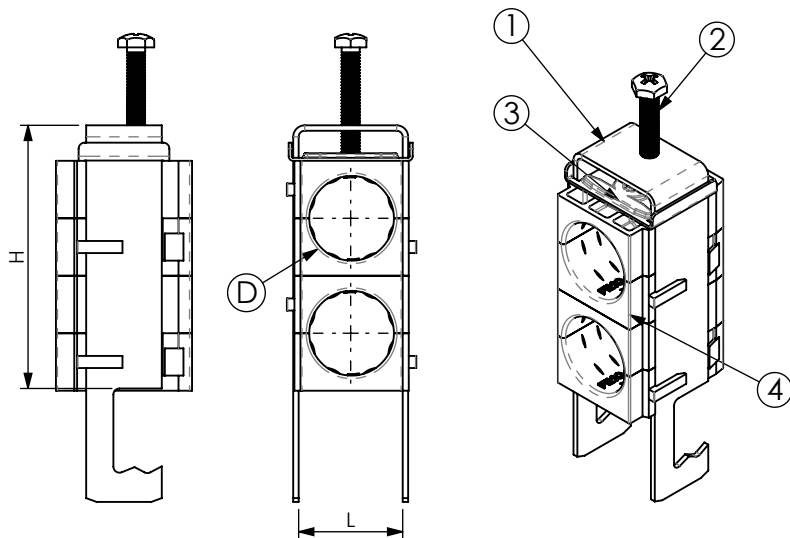

A) SPECIFICATIONS

- 1 Stainless steel AISI304 bow
Hooking on flat 3-25 and round $\varnothing$ 8-25.
- 2 Self-locking pressure screw M6 or M8 AISI304
- 3 Stainless steel AISI304 sliding pressure plate.
- 4 SAS black P.A.fiberglass saddles

B) RESISTANCE TESTS

UV Test BS-ISO 105-B06
Vibration test conforming to IEC 60068-2-6
Corrosion test: UNI EN ISO 9227
Operating temperature: -30°C +120°C

C) PACKAGING INFORMATION

Packing in boxes.
Label indicating:
product code, article, quantity,
production batch,
FIMO logo and figure.
(Customer code on request).

D) MOUNTING INSTRUCTIONS

IST026

CODE	ARTICLE	$\varnothing$ D	L	H	BOX	WEIGHT
61 1556 0206	sRF M/ 2x6	5 - 6	12	33	50	58
61 1556 0207	sRF M/ 2x7	6 - 7	12	33	50	58
61 1556 0208	sRF M/ 2x8	7 - 8	12	33	50	58
61 1556 0209	sRF M/ 2x9	8 - 9	12	33	50	58
61 1556 0291	sRF M/ 2x9 M	9 - 10	12	33	50	58
61 1556 0210	sRF M/ 2x10	10 - 11	12	33	50	56
61 1556 0211	sRF M/ 2x11	10 - 11	22	63	50	106
61 1556 2012	sRF M/ 2x12	11 - 12	22	63	50	106
61 1556 0213	sRF M/ 2x13	12 - 13	22	63	50	106
61 1556 0214	sRF M/ 2x1 1/2" S (14)	13 - 14	22	63	50	106
61 1556 0238	sRF M/ 2x3 7/8" (16)	15 - 16	22	63	50	102
61 1556 0212	sRF M/ 2x1 1/2" (17)	16 - 17	22	63	50	98
61 1556 0258	sRF M/ 2x5 7/8" (23)	21 - 23	34	87	25	171
61 1556 0227	sRF M/ 2x7 7/8" S (27)	26 - 27	34	87	25	166
61 1556 0278	sRF M/ 2x7 7/8" (28)	27 - 28	34	87	25	166
61 1556 2178	sRF M/ 2x7 7/8" M (30)	29 - 30	34	87	25	165
61 1556 2118	sRF M/ 2x1.1 7/8" (38)	36 - 38	46	111	25	238
61 1556 2114	sRF M/ 2x1.1 1/4" (40)	39 - 40	46	111	25	238
61 1556 2148	sRF M/ 2x1.5 7/8" S (49)	48 - 49	58	137	25	213
61 1556 2158	sRF M/ 2x1.5 7/8" (52)	50 - 52	58	137	25	211
61 1556 2214	sRF M/ 2x2.1 1/4" (60)	59 - 60	70	161	25	352
61 1556 0262	sRF M/ 2x62	60 - 62	70	161	25	337

RI	DATE	DR	DATE	AP	Description:
02					<i>Stainless cable clamps type sRF M For 2 coaxial cables, complete with 4 calibrated saddles. For articles see schedule.</i>
01	02/12/2021	E.N.	02/12/2021	A.V.	
	UPDATED BOX QUANTITY				
00	06/10/15	G.S.	06/10/15	A.V.	
1 ST EMISSION					
					<i>Use: Fixing of 2 cables on flat 3-25 and round ø 8-25.</i>
					