


PRODUCT DATA SHEET

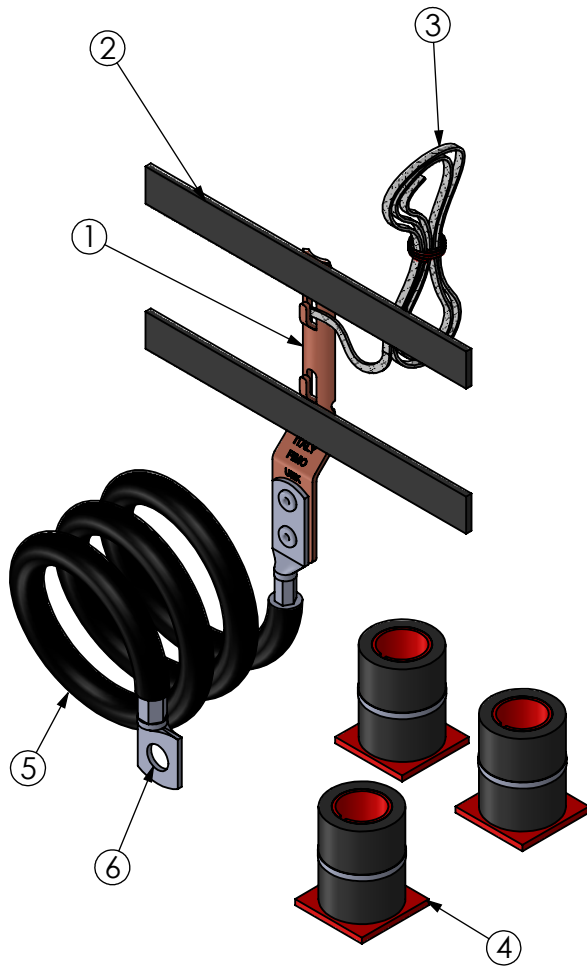

A) SPECIFICATIONS

- 1 Tinned Brass contact bar
- 2 Butyl strip
- 3 Tin-plated copper mesh
- 4 Protecting and sealing self-agglomerating silicone tape. Color black on reel
- 5 Rigid 7x1.70= 16mm² copper cable, black P.E. insulation
- 6 Cable lug Ø8: Tinned copper

B) RESISTANCE TEST

Lightning test:

Peak Current 100 kA (10/350 µs)

Charge 50C

Protection Level III-IV in accordance with IEC 61312-1 Standard

Water Tightness:

IP 68 (FIMO Test in accordance with IEC60529)

Corrosion Test:

Salt Spray test in accordance with ISO 9227 Standard

Contact Resistance: ≤ 1 mOhm

Operating Temperature: -50°C +80 °C

C) DELIVERY MODALITIES

Packing in boxes ok 10 kits

Label indicanting:

product code, article, production, batch

FIMO logo and picture

(customer code on request)

D) MOUNTING INSTRUCTION

UEK IST 024 REV 0

code	6115050003
article	UEK 3 M

	
10	0.0847kg

RI	DATE	DR	DATE	AP	<i>Description:</i> UEK 3 M=monoblock earthing Kit for Cables d. 31-60
02					
01					
00	17/06/2014	E.B.	17/06/2014	A.V.	
1 ST EMISSION					
					<i>Use:</i> Earthing of coaxial cables and elliptic or rectangular waveguides Coaxial Cable : 1.1/4" - 1.5/8" - 2.1/4" Elliptic guide : 52 - 54 - 60 - 63 - 64 - 70 - 77 - 78 - 90