


PRODUCT DATA SHEET

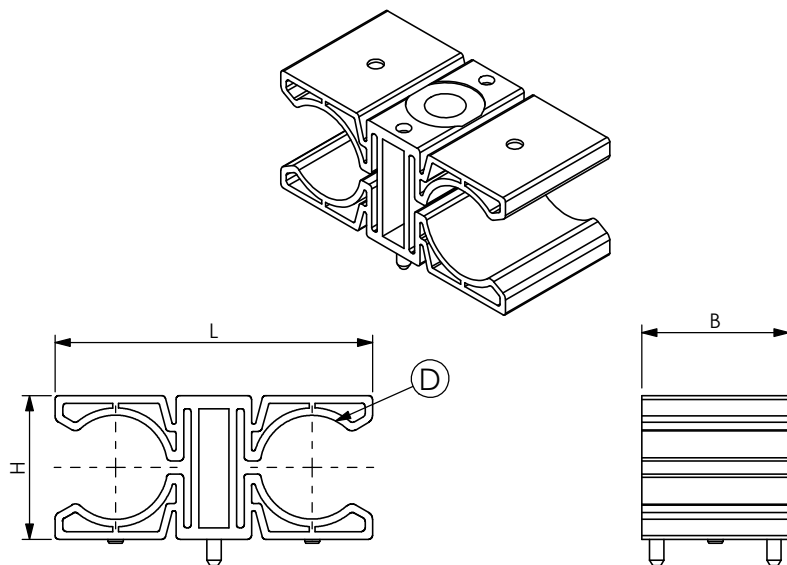

A) SPECIFICATIONS

H.D.P.E. U.V. resistant

B) RESISTANCE TESTS

Operating temperature: -30°C + 120°C

C) PACKAGING INFORMATION

Packing in boxes.

Label indicating:

product code, article, quantity,

production batch,

FIMO logo and figure.

(Customer code on request).

D) MOUNTING INSTRUCTIONS

On request

CODE	ARTICLE	ø D	H	L	B	BAG	BOX	WEIGHT
61 3308 0012	SAL/ 2x1/2"	16 - 17	27	62	39	20	500	30
61 3308 0078	SAL/ 2x7/8"	27 - 29	38	84	39	20	100	40
61 3308 0114	SAL/ 2x1.1/4"	38 - 40	50	102	39	20	100	75
61 3308 0158	SAL/ 2x1.5/8"	50 - 52	61	119	39	20	100	100

RI	DATE	DR	DATE	AP	Description:
02					
01					
00	15/12/16	G.S.	15/12/16	A.V.	
1 ST EMISSION					
 Setting Installation Standards 					

SAL - saddles

Elastic monobloc twin saddle
Speedy mounting
Side insertion of cables

FI.MO.TEC. S.p.a. reserves the right to modify the technical specifications without prior notice, according to the technical progress
 Copyright FI.MO.TEC. S.p.a. All rights reserved.